


6" DIA  
TOP PAD

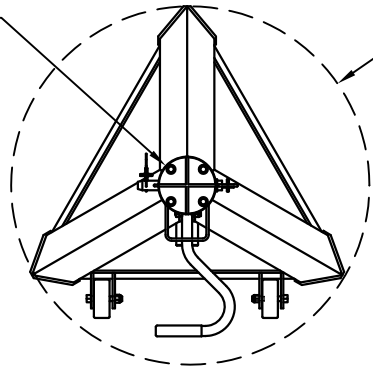


37 1/4 DIA [.95]  
FLOOR SPACE

Conforms to  
ASME  
PASE-2014

STANDARD  
RUBBER PAD  
(QUICK PIN  
REMOVABLE)

2 1/2" DIA  
ACME THREAD  
ROD

TUBE HANDLE



YOKE PAD \*  
(OPTIONAL  
ACCESSORY)

1" DIA HITCH PIN

ERGONOMIC  
HANDLE  
WITH GRIP

\* STORAGE FOR OPTION  
YOKE PAD

4" x 4" x 1/4 THK  
SUPPORT ANGLES

7" THREAD  
ADJUSTMENT

3 1/2 OD x 2 3/4 ID  
CENTER TUBE

4 1/2 OD x 3 3/4 ID  
BASE TUBE

77 7/16

46 13/16

4" DIA WHEELS

SPRING  
ASSISTED  
EXTENSION

MOHAWK JACK STAND  
MODEL #JS-4775-40  
CAPACITY: 40,000 LB

C-SIZE

**NOTICE OF CONFIDENTIAL INFORMATION**

INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND PROPERTY OF MOHAWK RESOURCES LTD.. WHERE DRAWING IS FURNISHED TO OTHERS IT SHALL BE USED SOLELY FOR PURPOSES OF INSPECTION, INSTALLATION, OR MAINTENANCE. THE INFORMATION SHALL NOT BE USED OR DISCLOSED BY THE RECIPIENT FOR ANY OTHER PURPOSES WHATSOEVER.

**NOTES:**

1. REMOVE ALL SHARP CORNERS & EDGES.
2. UNLESS OTHERWISE SPECIFIED, SURFACE FINISH TO BE 125 RMS.
3. WELDING MEDIUM SHALL CONFORM TO AWS SPECIFICATIONS TO E-70XX ELECTRODES OR E-70TI CODE 5.3 FLUX CORE WIRE ONLY.

**TOLERANCES:**

ANGULAR ± 1°  
FRACTIONAL ± .030  
DECIMAL:  
0.XX ± .030  
0.XXX ± .005

FILE NAME  
JS-000-A-SPEC16

NEXT ASSEMBLY

SCALE  
1/10

CHECKED

DATE  
9/2016

DRAWN  
rww7089

APPROVED

WEIGHT  
218 LB.

**MOHAWK RESOURCES LTD.**

TITLE Jack Stand (PASE VERSION)  
JS-4775-40

FRDM  
N/A

DRAWING NUMBER  
JS-000-A-SPEC16

