


MODEL TR-110/120 SPECIFICATIONS

Capacity:	TR-110: 90,000 lbs. TR-120: 120,000 lbs.
Lifting Speed:	120 seconds approximately
Motor Rating:	20 HP
Overall Length:	34'-5" for 30' Tracks (longer lengths available)
Overall Width:	15'-9" (wider or narrower available)
Approach Ramps :	5 Degree = 14' (longer or shorter avail.)
Lifting Stroke:	5'
Height @ Full Stroke:	6'-6 7/8"
Track Length:	30' standard (longer or shorter lengths available)
Track Width:	36"
Inside Track Clearance:	3'-6" standard (wider or narrower available)
Track Adjustment:	3'-6" inside to 9'-6" outside (wider or narrower available)
Clearance Between Posts:	11'-2 3/4" (wider or narrower available)
Lifting Mechanism:	Four direct drive hydraulic cylinders using no cables, chains or mechanical lifting screws
Synchronization (Side to Side):	Hydraulic fluid displacement backed by twin opposing non-load bearing leaf chains
Synchronization (Fore and Aft):	Automatically controlled with electrical fluid track leveling system and hydraulic gear-type flow divider with solenoid controlled valving
Mechanical Safety Release:	Single point air release
Mechanical Safety Locks:	Multi-position every 6"
Back-up Hydraulic Safety Systems: ..	Pressure compensated flow controls & velocity fuses and manual pump and valving to allow lowering in a no power situation
Electrical Safety Systems:	Cross-wired electronic system with out of level shut-off safety backup
Wheel Chocks:	Standard equipment
Floor Requirements:	6" thick, 4000 PSI
Work Area Around/Under Lift:	Clear & unobstructed when lift is raised
Lift Weight:	37,500 lbs. (with 30' tracks)
Warranty:	3 year Mohawk exclusive lift warranty (see specific warranty details)

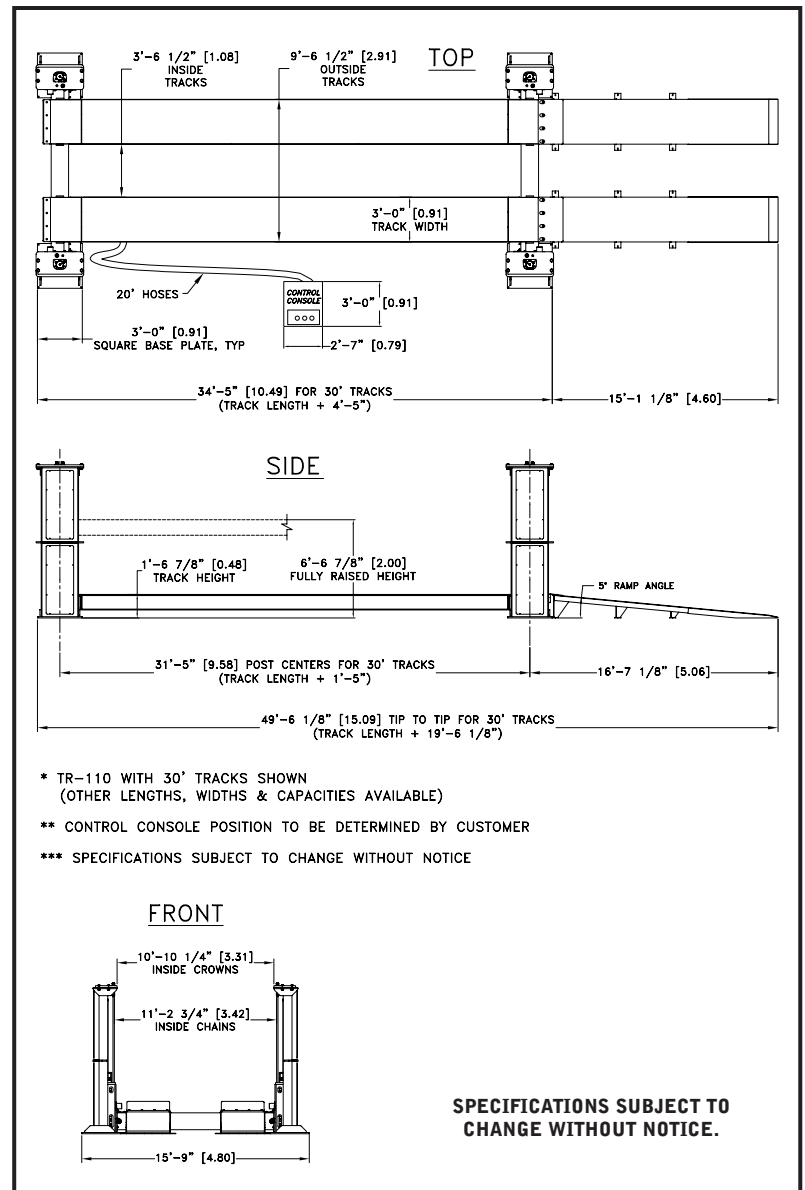

Other Available Options:

- Drive through ramps
- Rolling oil drain pan
- Air lines in tracks
- 110V outlets in tracks

Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.

Mohawk lifts are manufactured in compliance with the following standards: OSHA, ALI, ANSI, ASME, AISI, ASTM, ASA, NEC, AWG, NEMA.

MEETS NATIONAL ANSI & OSHA CODE FOR LIFTS.

DISTRIBUTED BY:



Mohawk Resources, LTD.

P.O. Box 110

65 Vrooman Ave

Amsterdam, NY 12010

(800) 833-2006

(518) 842-1431

FAX: (518) 842-1289

www.mohawklifts.com



AVAILABLE UNDER STATE GOVERNMENT CONTRACTS IN ALL 50 STATES



GSA contract #GS07F-7099B

