


# PARALLELOGRAM SPECIFICATIONS

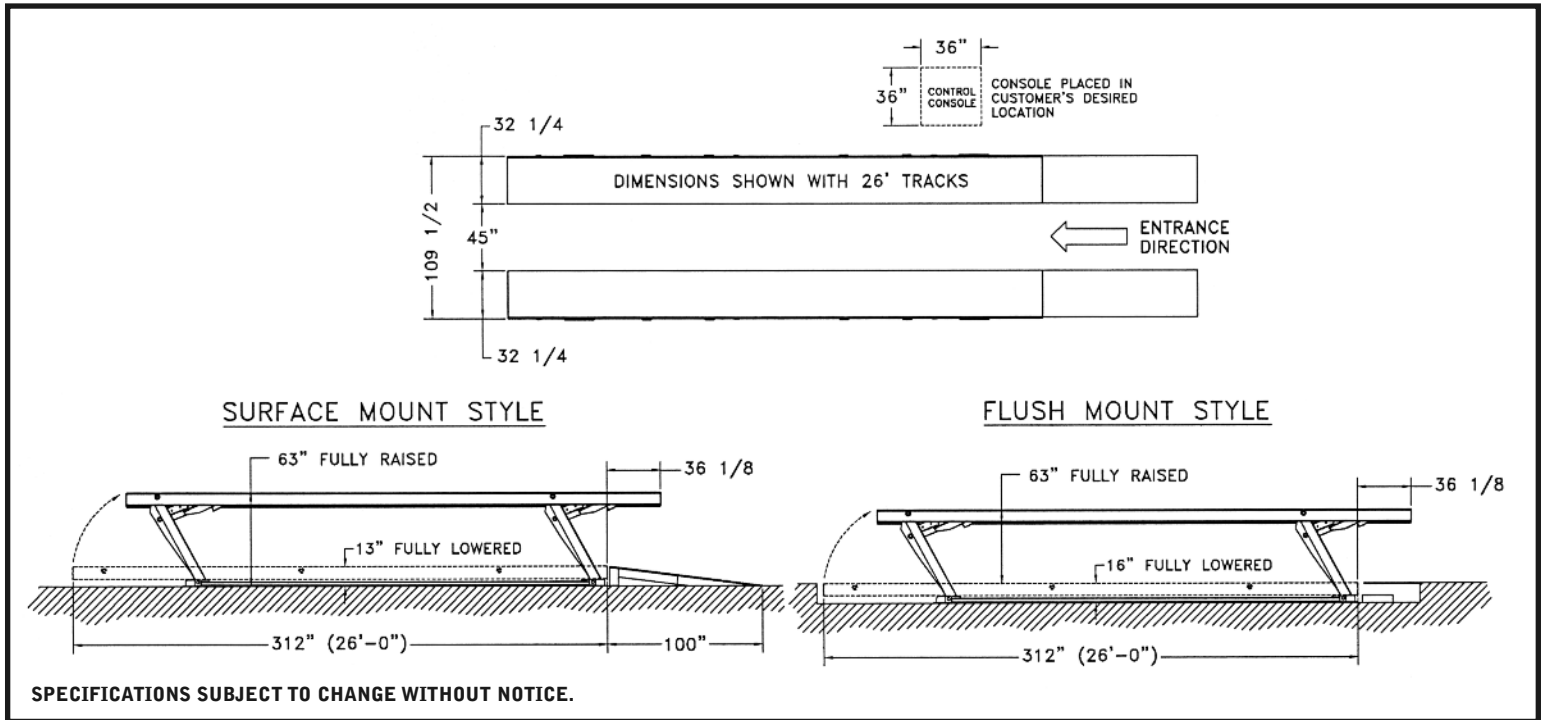

<b>Capacities</b>	36,000, 50,000, 75,000 or 100,000 lbs (16329, 22680, 34019 or 45359Kg)
<b>Track Lengths</b>	26', 30', 32', 36', 44', or 48' (7.92m to 14.63m)
<b>Approach Ramp length</b>	100" (2.54m) - (standard—shorter or longer or portable available)
<b>Overall Length (SM model)</b>	34'6" to 56'4" (10.52 to 17.17 meters)
<b>Lifting Height (stroke)</b>	63" SM or 79" FM (1.60m SM or 2.00m FM)
<b>Lowered Height</b>	13" (.33m) on SM or 16" (.41m) on FM
<b>Track Width</b>	32" (.81m)
<b>Overall Width</b>	109 1/2" (2.78m)
<b>Width Between Platforms</b>	44" (1.12m)
<b>Lifting Speed</b>	60 Seconds
<b>Power Requirements</b>	20 H.P. 220/440/575 volt 3 Phase motor
<b>Horizontal Movement</b>	36 1/8" (.92m) @ full stroke

- OPTIONAL EQUIPMENT**
- Rolling Jacks/Jacking Platforms
  - Florescent lighting
  - Tire Dolly (Manual or Air/Hydraulic)
  - Keyed Control Lock-Out
  - Stainless Steel Bases
  - Marine Paint (Rustoleum standard)
  - Drive Thru Ramps
  - Tape Switch-Shut Off
  - Movable Approach Ramps

**SM = Surface Mount Model**  
**FM = Flush Mount Model**

*THESE LIFTS CONFORM TO ANSI/ALI STANDARDS*

Mohawk builds the best products with the finest materials, to the highest standards. Just compare our lifts. Our staff will assist you with a fleet evaluation, design assistance and answer any technical questions you have. We invite your calls.

Mohawk lifts are manufactured in compliance with the following standards:  
OSHA, ALI, ANSI, ASME, AISI, ASTM, ASA, NEC, AWG, NEMA.

MEETS CURRENT NATIONAL ANSI & OSHA CODE FOR LIFTS.



**AVAILABLE UNDER  
DISCOUNTED  
GOVERNMENT CONTRACT  
IN ALL 50 STATES**


Mohawk Resources, LTD.

P.O. Box 110  
65 Vrooman Ave  
Amsterdam, NY 12010  
(800) 833-2006  
(518) 842-1431  
FAX: (518) 842-1289

[www.mohawklifts.com](http://www.mohawklifts.com)



GSA  
contract  
#GS07F-  
7099B



**For more detailed product  
information read this book at  
[www.mohawklifts.com](http://www.mohawklifts.com).**

**DISTRIBUTED BY:**