

MOHAWK MP-18 TANDEM DATA SHEET:


TIRE DIMENSIONS

ENTER DIMENSION FOR LARGEST AND SMALLEST TIRES:


	DIM. 'A'	DIM. 'B'	DIM. 'C'	DIM. 'W'	TIRE SIZE
LARGEST					
SMALLEST					

1. SELECT LIFT MODEL BELOW:

	POST NUMBER							
	1	2	3	4	5	6	7	8
FORK LENGTH ON POST (15" OR 22")								
POST CAPACITY (15"=18K, 22"=16K)								
TANDEM POST? (YES OR NO)								



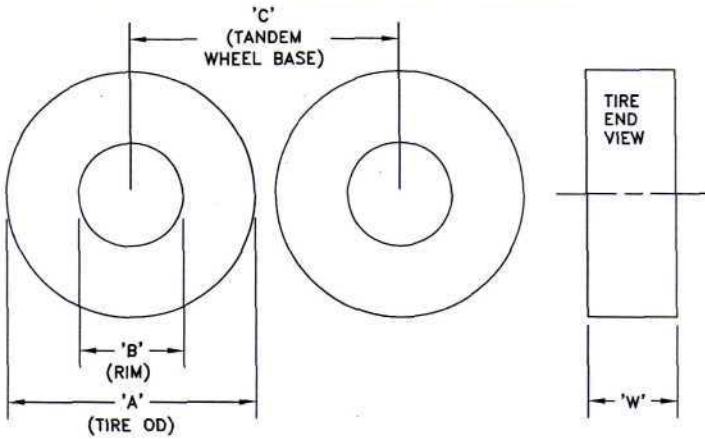


MP-18 TANDEM (shown with 22" FORKS)

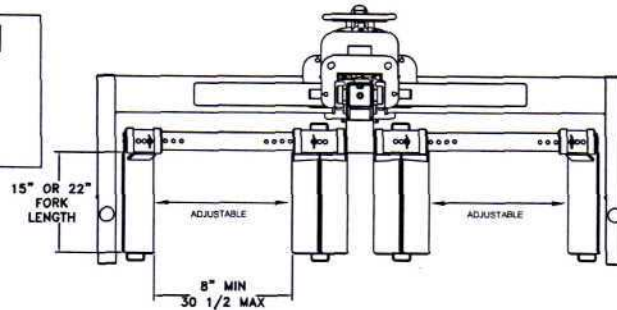

MP-18 TANDEM POST SPECIFICATIONS:

CAPACITY:	18,000 LB EACH (with 15" Forks)
CAPACITY:	16,000 LB EACH (with 22" Forks)
STROKE:	67 INCHES
LIFTING SPEED:	67 SECONDS
POWER REQUIRED:	208-220 VAC, 3Ø STD
AMPS:	VARIABLE - SEE POST QTY
POST QUANTITY:	2, 4, 6 OR 8
MAX TIRE SIZE:	53 INCH DIA
FORK LENGTH:	15 or 22 INCH
FORK WIDTH:	8 INCH MIN, 30 1/2 MAX
LOCK POSITIONS:	3" INTERVALS STARTING @ 12"

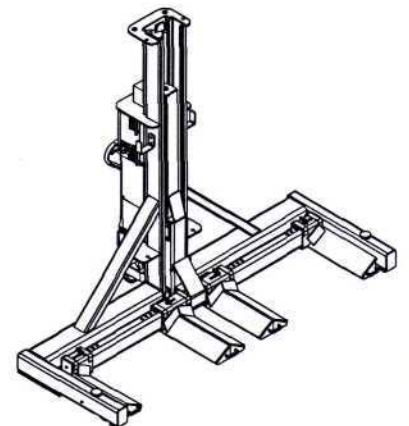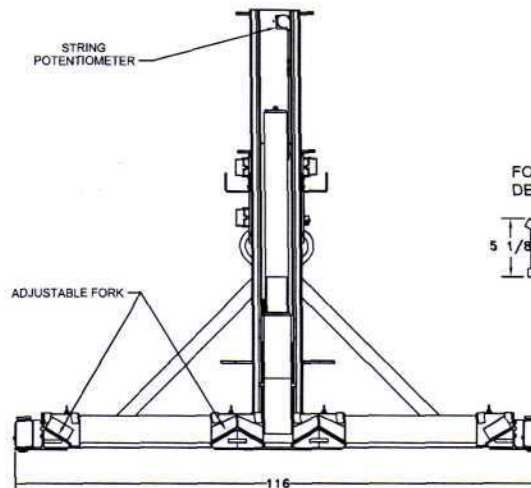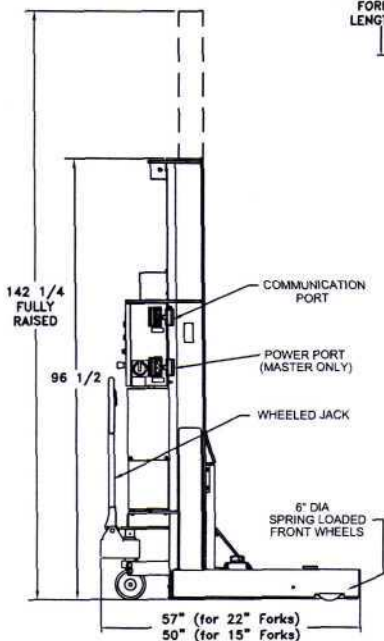

REV.	DESCRIPTION	DATE	BY	APP'D.
	ITEM NUMBERS CORRECTED. ITEM 11 ADDED.	4/2012	R.V.	
CUSTOMER NAME:				
CONTACT:				
PHONE NUMBER:				

1. WHAT DOES THE HEAVIEST VEHICLE WEIGH:

2. WHAT DOES THE HEAVIER END OF THE VEHICLE WEIGH?
(I.E., FORK LIFT COUNTERWEIGHTS, REAR END MOUNTED ENGINES)

3. VERIFY POWER SUPPLY BELOW:
POWER SUPPLY: (CHECK ONE)

POWER SUPPLY:	FULL LOAD AMPS PER POST *	
208-240 VAC, 3 PHASE, 60 HZ	10 AMP PER POST	← STANDARD
440-480 VAC, 3 PHASE, 60 HZ	5 AMP PER POST	
550-600 VAC, 3 PHASE, 60 HZ	4 AMP PER POST	
208-240 VAC, 1 PHASE, 60 HZ	10 AMP PER POST	
OTHER:		

* RECOMMENDED CIRCUIT BREAKER SIZE IS 1.5 TO 2 TIMES THE SUM OF THE FULL LOAD AMPS FOR ALL THE POSTS IN THE SYSTEM.

4. DO VEHICLES HAVE LARGE DIAMETER TIRES REQUIRING WIDER FORKS?
(CHECK ONE)

<input type="checkbox"/>	NO, USE STANDARD WIDTH FORKS	← STANDARD
<input type="checkbox"/>	YES, USE _____" WIDER FORKS	

5. OPTIONS INCLUDES: (CHECK ALL THAT APPLY) - (SEE NOTE*)

<input type="checkbox"/>	#MJS-1830-18, JACK STAND, 18,000 LB, 18" TO 30"
<input type="checkbox"/>	#MJS-3047-18, JACK STAND, 18,000 LB, 30" TO 47"
<input type="checkbox"/>	#MJS-4775-18, JACK STAND, 18,000 LB, 47" TO 75"
<input type="checkbox"/>	#MJS-1830-24, JACK STAND, 24,000 LB, 18" TO 30"
<input type="checkbox"/>	#MJS-3047-24, JACK STAND, 24,000 LB, 30" TO 47"
<input type="checkbox"/>	#MJS-4775-24, JACK STAND, 24,000 LB, 47" TO 75"
<input type="checkbox"/>	#TD-1000-M, TIRE DOLLY, 1000 LB CAPACITY, HAND WINCH
<input type="checkbox"/>	#TD-1000-H, TIRE DOLLY, 1000 LB CAPACITY, FOOT PUMP
<input type="checkbox"/>	#TD-1000-A, TIRE DOLLY, 1000 LB CAPACITY, AIR/HYD
<input type="checkbox"/>	CHASSIS CONTACT LIFTING BEAM (FOR 2 POSTS) - NOT TANDEMS
<input type="checkbox"/>	FORK TRUCK ADAPTER KIT (FOR 2 POSTS) - NOT TANDEMS
<input type="checkbox"/>	AUTO FRAME CONTACT ADAPTER KIT (FOR 2 POSTS) - NOT TANDEMS
<input type="checkbox"/>	WING PLOW ADAPTERS (FOR 2 POSTS) - NOT TANDEMS
<input type="checkbox"/>	HMMVV (FRONT TO REAR) ADAPTERS (FOR 2 POSTS) - NOT TANDEMS
<input type="checkbox"/>	ADDITIONAL POWER CABLE (ONE STANDARD 25' LG CABLE INCLUDED PER LIFT)
<input type="checkbox"/>	LONGER POWER CABLE ___' (ONE STANDARD 25' LG CABLE INCLUDED PER LIFT)
<input type="checkbox"/>	ADDITIONAL COMMUNICATION CABLE (ONE SET OF 30' LG CABLES INCLUDED PER LIFT)
<input type="checkbox"/>	LONGER COMMUNICATION CABLE ___' LG X ___ QTY
<input type="checkbox"/>	ADDITIONAL DUMMY PLUG SET (ONLY ONE SET INCLUDED PER LIFT)
<input type="checkbox"/>	HAND PENDANT CONTROL WITH 25' CORD
<input type="checkbox"/>	OTHER:
<input type="checkbox"/>	OTHER:

* NOTE: SOME OPTIONS ARE NOT COMPATIBLE, CONSULT MOHAWK.

6. PROPOSED/REQUESTED DELIVERY DATE: ___/___/___

7. IS THIS FOR A CONSTRUCTION PROJECT: YES NO
IF NO, CAN THE LIFT SHIP AT ANYTIME? YES NO
IF YES, WHEN SHOULD MOHAWK VERIFY PRODUCTION TIME?
DATE: ___/___/___
CONTACT: _____
TEL: _____

8. THIS DRAWING HAS BEEN REVIEWED AND FOUND TO BE ACCEPTABLE TO ALL CUSTOMER'S SPECIFICATIONS INDICATED:

MOHAWK REPRESENTATIVE _____ DATE _____

OWNER, GENERAL CONTRACTOR AND/OR ARCHITECT. _____ DATE _____

9. FINAL ELECTRICAL CONNECTION TO LOCAL/NATIONAL CODE IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR. MORE THAN ONE POINT OF CONNECTION MAY BE REQUIRED. DISCONNECT SWITCHES, MAIN FUSES, AND MAIN POWER LEADS, ETC. ARE NOT PROVIDED BY MOHAWK RESOURCES LTD.

10. AFTER ALL SPECIFICATIONS HAVE BEEN SELECTED AND APPROVED BY CUSTOMER (SIGNED), MAKE COPY FOR CUSTOMER AND RETURN SIGNED FORM TO MOHAWK AT ADDRESS OR FAX BELOW.

11. ARE THESE COLUMNS BEING ADDED TO AN EXISTING SET OF MOBILE COLUMNS ?

YES NO

IF YES, PLEASE LIST MODEL NUMBERS AND SERIAL NUMBERS

MODEL #	SERIAL #



MOHAWK RESOURCES LTD.
65 VROOMAN AVENUE
P.O. BOX 110
AMSTERDAM, NY 12010
PHN: 1-800-833-2006
FAX: 1-518-842-1289
www.mohawkkliffs.com

MOHAWK MP-18-TANDEM

FOR SO#: _____

SCALE n/a	DRAWN RV	MOHAWK RESOURCES LTD.		
CHECKED	APPROVED	TITLE (TANDEM) MP-18 Series Data Verification		
DATE 11/05	WEIGHT n/a LB.	FROM n/a	DRAWING NUMBER ZZ958-02	