## **MOHAWK LIFTS**

# MOBILE COLUMN LIFTS DARE TO COMPARE

Mohawk MP-Series vs. the Competition



Do you know the limitations of other brands?

#### **COLUMN CONSTRUCTION**

Mohawk mobile column lifts are made with fork lift masts. Fork lift masts are built to last forever, vs. bent sheet metal columns, which is weakened sheet metal.



Bent Sheet Metal Columns & Support "Strips" / "Braces"



#### **OPERATING CONDITIONS**



- **#1** Mohawk Lifts DO NOT have limiting ambient temperature operating conditions.
- **#2** Mohawk Lifts CAN BE used on a 3° max floor slope. Mohawk offers a slope indicator accessory to verify the angle of shop floor.
- **#3 -** Mohawk's mobile columns have available 22" lifting forks to raise both dual tires.
- **#4** Mohawk Lifts DO NOT have limiting operation conditions on duty cycle times.



#### **Competitor Lift Mobile Column Warning Decal**

#### OPERATING INSTRUCTIONS Only Authorized Personnel Are to Operate Lift, Before operating lift, read Operation & Maintenance Manual and Safety documents supplied with lift. A WARNING This motor has internal arcing or sparking parts. To minimize the Risk of Explosion, DO NOT expose to flammable vapors. OPERATING CONDITIONS: Lift is not intended for outdoor use and has an operating ambient temperature #1 range of 41°-104°F (5°-40°C). DO NOT use lift in a manner other than intended. Included (but not limited to) examples of unapproved uses of the lift are: lifting vehicle by only one side, lifting different axles with a column pair, and lifting non-approved items. See Operation Manual for more detailed instructions. DO NOT use on asphalt. Lift must be on concrete with a minimum strength of 3000PSI and a minimum thickness of 4.5", Maximum allowed floor slope is 1/8" per foot side to side of vehicle and 1/4" per foot front to rear of vehicle. DO NOT use on a suspended floor structure without specific approval from structural engineer Ensure tires are properly inflated before lifting. DO NOT exceed tire load rating when raising vehicle. #3 Motor duty cycle is one full lifting operation within a 10 minute period. Example: 80 second rise time, 8 minutes #4 40 second rest. **Error Codes and Explanations:** Release parking brake before raising vehicle. E1 Improper Configuration

## **LIFTING FORKS**

#4

Mohawk uses 22" lifting forks to fully engage dual rear tires. Shorter forks won't fully engage a flotation tire or grab **both rear tires** which over pressurizes the tires.





#### **MOBILE - SAFETY**

#5

Mohawk mobile columns have large baseplates & retractable rubber wheels to ensure load is grounded and stabilized



Note: Competitive lifts make minimal contact with the shop floor. Retractable wheels are safer. Would you go weightlifting in roller skates?





Notice minimal contact with floor area under column

**COMPETITORS** 


Wheels bear much of the load

Mohawk Lifts are designed and built above and beyond the industry standards for safety and quality. Mohawk builds lifts to last a **LIFETIME**.



This photo shows weld quality on a competitors' mobile column lift

Photo taken at APWA Show in Anaheim CA

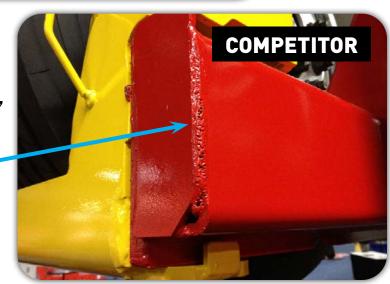


#### **LIFT OPERATION**

Unlike other lifts, Mohawk mobile columns use touch screens and easy to follow startup sequence unlike the competiton.

#### MOHAWK LIFTS




Mohawk's easy to follow startup and operational controls

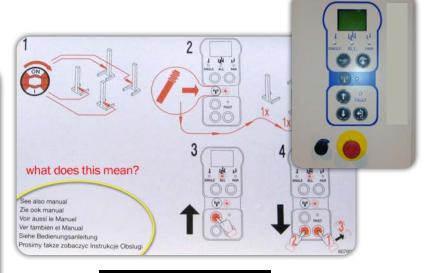



Mohawk's wide rubber coated, bearing enclosed wheels help ease column movement whereas some other lifts use solid plastic or metal wheels which can easily get stuck on expansion seams, stones, or a dropped washer on the shop floor.

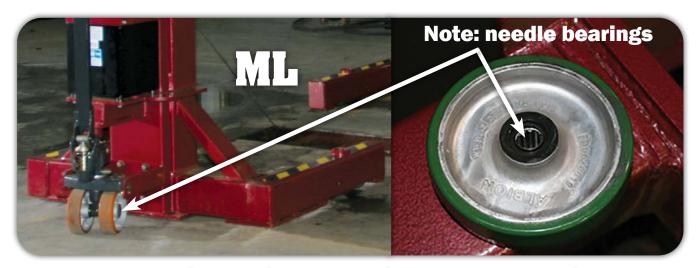

Note: solid plastic wheels without rubber coating



## **ADJUSTABLE FORKS**

Adjustable forks don't need wheel reducer sleeves which can be forgotten, reduce lifting capacity or slip off



vs. fixed position forks that require wheel reducer sleeves for smaller tires



## FRONT TO REAR ADAPTERS





Mohawk's slip-on front to rear bumper adapter allows lifting with only two columns with a maximum lifting capacity of 26,000 lbs

Other brands offer this option but with just a small fraction of the lifting capacity





# DOUBLE WIDE COLUMN OPTION #11

Mohawk offers double wide columns for tandem wheel lifting (4 columns do the work of 6 columns).









## **AUTO FRAME ADAPTERS**



Mohawk's auto frame adapter quickly slides over lifting forks & allows two columns to raise cars & light trucks by the frame to leave wheels free.











- raise another vehicle.
- Adjustable height stands are available in 47-77" and 30-47" varieties.

#### OTHER MOHAWK OPTIONS





**PENDANT CONTROL -** Allows walk around remote operation to view all columns



#### FORK TRUCK ADAPTER KIT

- Permits two columns to be used to raise fork lifts
- Mohawk's fork lift adaptor capacity is ALI certified to 28,000 lbs.



#### WING PLOW ADAPTER/RV SLIDE OUT ADAPTER

 Allows wing snow plow trucks to be raised without removing

 Allows RV slides to be extended and lifted



**CHASSIS LIFTING BEAM -** Permits vehicles to be raised by the frame, leaving the **wheels hanging free**.

#### WHERE IS THE LIFT MADE


#15

Headquartered in Amsterdam, N.Y Mohawk mobile column lifts are proudly designed, welded, and manufactured in the U.S.A.







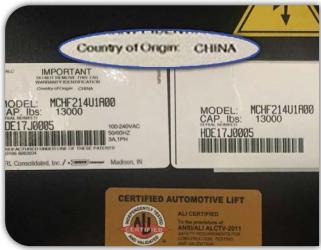



## MOHAWK LIFTS

- · Heaviest Built
- The Longest Warranty
- · Made in America

# Before You Buy Any Lift See a Mohawk Lift

Learn how our MP Mobile Column lifts compare to the competition www.mohawklifts.com/dare2compareMP

Call or visit Mohawk at:

1-800-833-2006 www.MohawkLifts.com

Mohawk Lifts is a trademark of Mohawk Lifts LLC., which is not affiliated with the competitors included in this comparative advertisement.